


SOUTHERN SPEED\พัสดุการวาง\500 KG HOIST 1.2X1.4X2-3fl.dwg [Model] Se

SHAFT, Vertical Section A-A'

SCALE 1:60

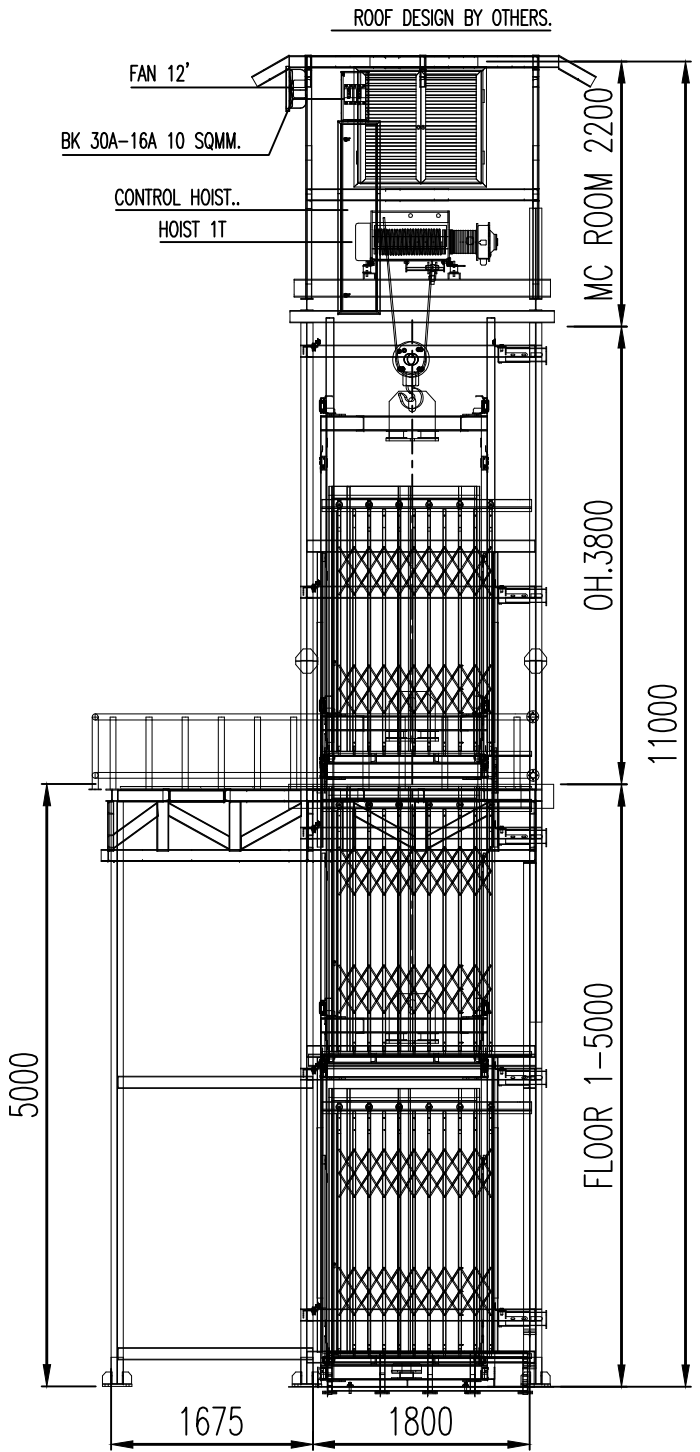


A-A'

SHAFT, Vertical Section B-B'


SCALE 1:60

Load [kg]	2400
-----------	------

ROOF DESIGN BY OTHERS.

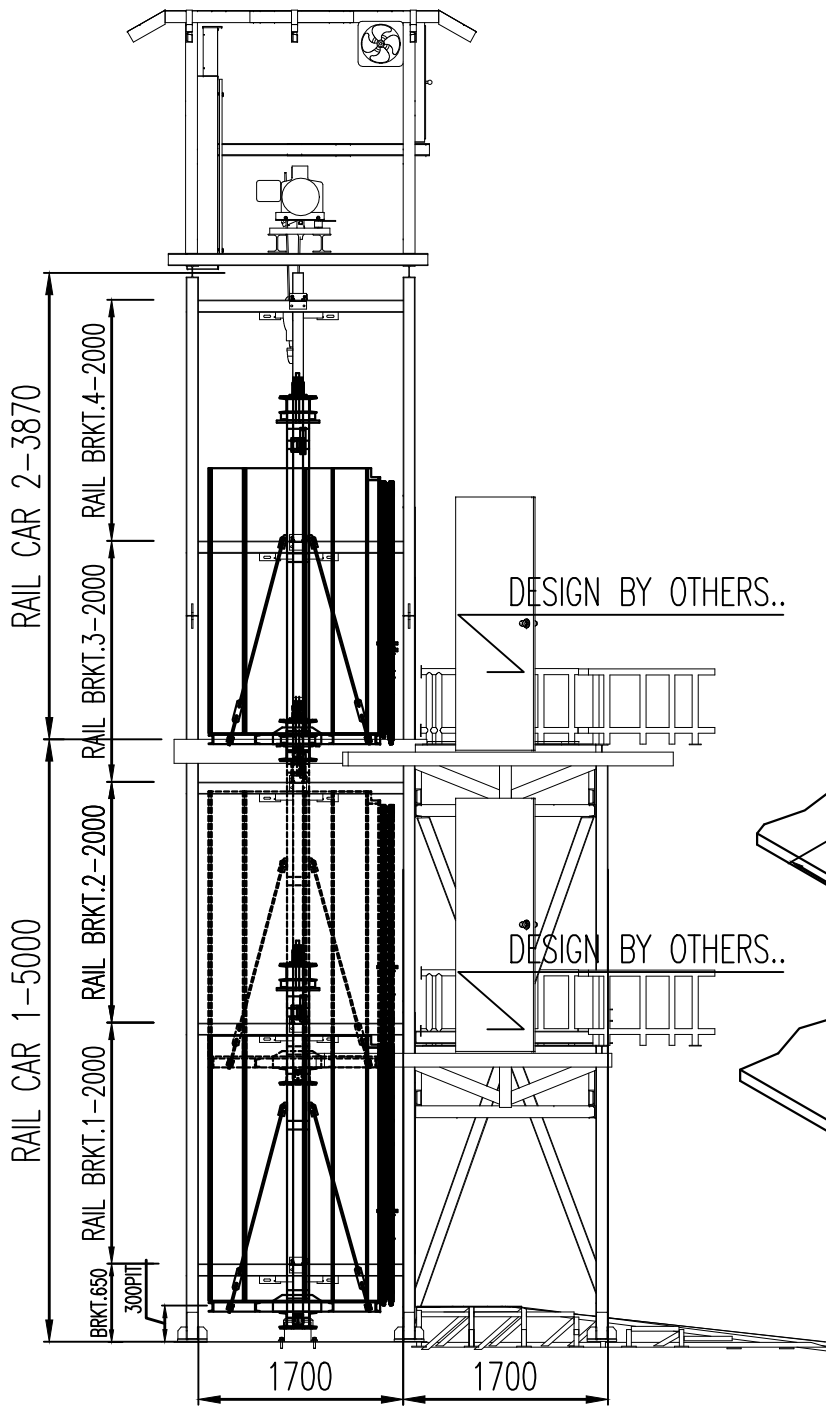

B-B'

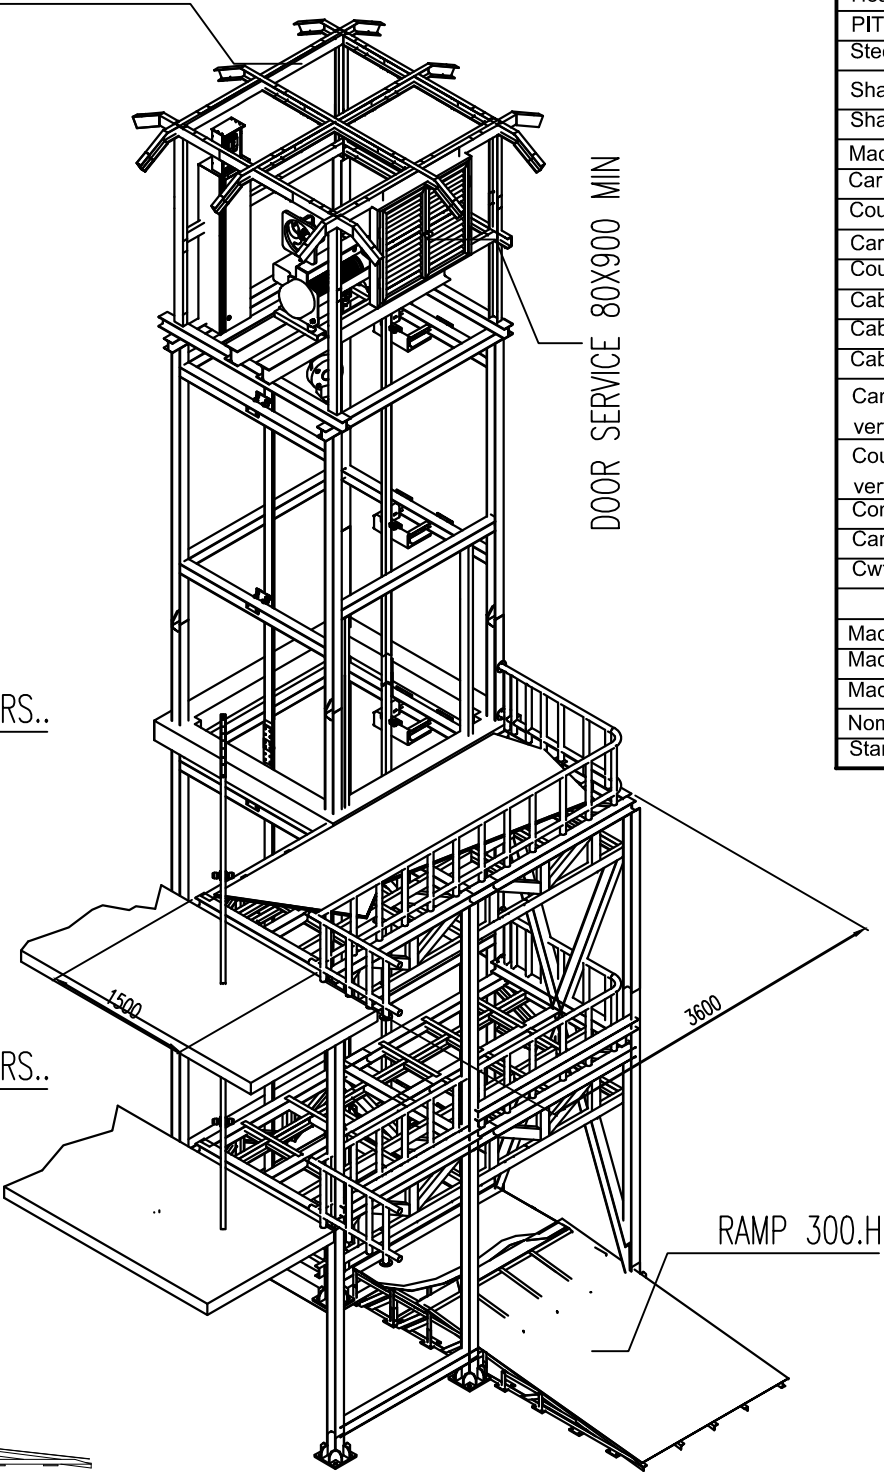

Type	Freight-hoist. 6. 2:1
Car speed	6- M/MIN
Rated load -	500 kg -
Car travel	5000 mm
Levels	3 (1,2,3)
Headroom mc. room	2200 mm
PIT	300 mm
Steel wire-ropes	Ø10 MM.
Shaft width	1700 mm
Shaft depth	1900 mm
Machine room	hoist sling mc.
Car guides rails	T125*82*1(18k)
Counterweight guides	
Car RG	2710 mm
Counterweight Rg	--mm
Cabin width, clear	1400 mm
Cabin depth, clear	1200 mm
Cabin height, clear (internal)	2000 mm
Car guide brackets vertical distance	max 2000 mm
Counterweight brackets vertical distance	max 2000 mm
Compensation chain	No
Car buffer (2x)	Elastogran 2400
Cwt buffer (1x)	Elastogran 2550
ELECTRIC MOTOR SPECIFICATIONS	
Machine	FREIGHT-PASS.MAN.
Machine nominal power	5,5 kW
Machine voltage	380V/3ph/20Hz
Nominal current	30 A
Starting current	16 A

NOTE. ELC. BK.MAIN 8-16SQMM.-G-6SQMM.5WIRE. MAX 40A-16A (220V)

500 KG.

DRAWING TITLE :

FREIGHT-HOIST 1T.

APPROVED
PRODUCED BY :
DRAWN BY : SUBSAENG S.KRAI
CHECKED BY :
PROJECT MANAGER :
DATE : 4092020

SCALE
HOR. A3
VER.

DRAWING NUMBER. 2/3